



- Triaxial IEPE Accelerometer
- Sensitivity – 10mV/g
- Shear design
- Piezoelectric ceramic PZT-5
- Mass – 8.5grams
- ¼-28UNF side entry 4 pin connector
- Tapped base for stud or adhesive mounting

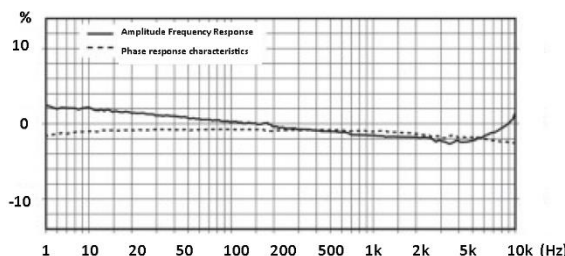

The GVT10S-T is a general purpose triaxial IEPE accelerometer for the measurement of broad band vibration in a wide range of vibration test applications, its small size and low mass make it an ideal all-rounder. The tapped base means it can be stud mounted or used with an adhesive base (KMS-ADH1 or KMISO-ADH).

| Specification | Metric | Imperial |
|-----------------------------|--|---------------------|
| Sensitivity | 1.02mV/(m/s ²) | 10mV/g |
| Measurement Range (pk) | ±4900m/s ² | ±500g |
| Frequency Range ±10% | (Z)1 to 8000Hz (X,Y) 1 to 7000Hz | |
| Resonant Frequency | ≥25 kHz | |
| Non-Linearity | ≤1 % | |
| Transverse Sensitivity | ≤5 % | |
| Electrical Noise Floor | 0.01m/s ² rms | 0.001g rms |
| Overload Limit (Shock) | ±49000(m/s ²)pk | ±5000gpk |
| Operating Temp. Range | -55 to +125°C | -67 to +257°F |
| Compliance Voltage (Supply) | +18 to +28 VDC | |
| Current range | 2 – 10mA | |
| Output Bias Voltage | 11VDC ± 1.5VDC | |
| Size (excluding connector) | 15x15x10 (mm) | 0.59x0.59x0.39 (in) |
| Weight | 8.5gm | 0.30oz |
| Sensing Geometry | Shear | |
| Sensing Element Material | PZT-5 | |
| Case Material | Titanium | |
| Connector Position | Side | |
| Case sealing | Hermetic | |
| Electrical Connection Type | ¼-28UNF 4 pin | |
| Mounting | 10/32UNF Tapped base for stud or adhesive mounting | |

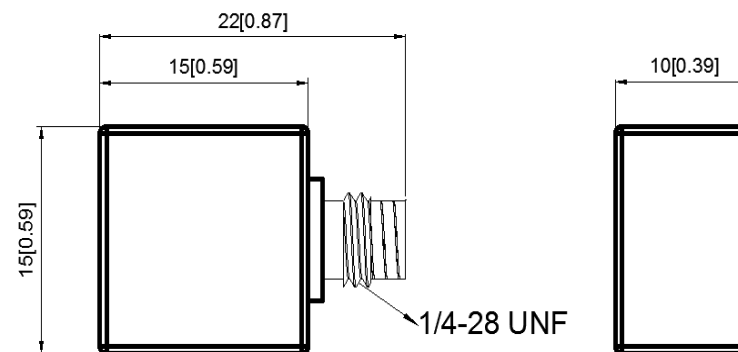

Kemo has a range of cable assemblies available for use with the GVT10S-T

- 7F82-50 – 5m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F82-30 - 3m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F81-50 - 5m cable ending in 3 x microdot plugs (X, Y, Z)
- 7F81-30 - 3m cable ending in 3 x microdot plugs (X, Y, Z)

Kemo Limited

First Floor, 33 King Street, Theford, Norfolk, IP24 2AW, United Kingdom
+44 (0)1474 705168



www.kemo.com sales@kemo.com

- Low Profile Triaxial IEPE Accelerometer
- Sensitivity – 100mV/g
- Shear design
- Piezoelectric ceramic PZT-5
- Mass – 8.5grams
- ¼-28UNF side entry 4 pin connector
- Tapped base for stud or adhesive mounting



The GVT100S-TL is a low profile general purpose triaxial IEPE accelerometer for the measurement of broad band vibration in a wide range of vibration test applications, its small size and low mass make it an ideal all rounder. The tapped base means it can be stud mounted or used with an adhesive base (KMS-ADH1 or KMISO-ADH).

| Specification | Metric | Imperial |
|-----------------------------|--|---------------------|
| Sensitivity | 10.2mV/(m/s ²) | 100mV/g |
| Measurement Range (pk) | ±490m/s ² | ±50g |
| Frequency Range ±10% | (Y,Z) 1 to 9000Hz (X) 1 to 8000Hz | |
| Resonant Frequency | ≥25 kHz | |
| Non-Linearity | ≤1 % | |
| Transverse Sensitivity | ≤5 % | |
| Electrical Noise Floor | 0.001m/s ² rms | 0.0001g rms |
| Overload Limit (Shock) | ±49000(m/s ²)pk | ±5000gpk |
| Operating Temp. Range | -55 to +125°C | -67 to +257°F |
| Compliance Voltage (Supply) | +18 to +28 VDC | |
| Current range | 2 – 10mA | |
| Output Bias Voltage | 11VDC ± 1.5VDC | |
| Size (excluding connector) | 15x15x10 (mm) | 0.59x0.59x0.39 (in) |
| Weight | 8.5gm | 0.30oz |
| Sensing Geometry | Shear | |
| Sensing Element Material | PZT-5 | |
| Case Material | Titanium | |
| Connector Position | Side | |
| Case sealing | Hermetic | |
| Electrical Connection Type | ¼-28UNF 4 pin | |
| Mounting | 10/32UNF Tapped base for stud or adhesive mounting | |

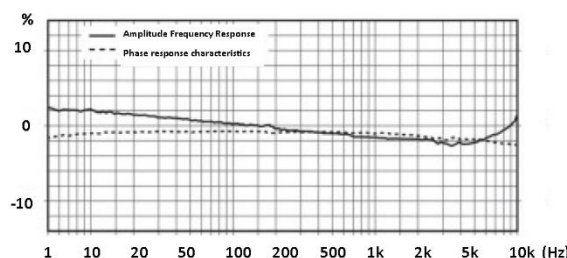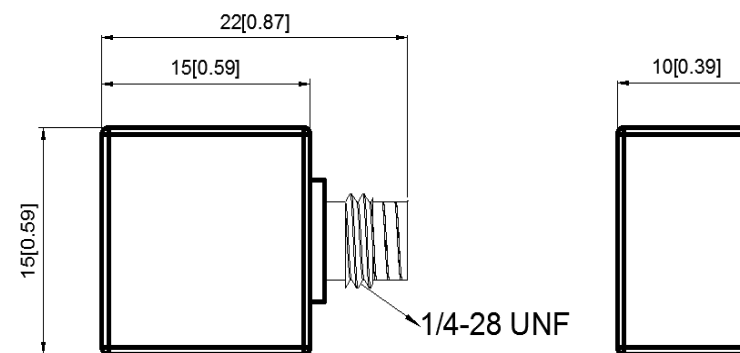

Kemo has a range of cable assemblies available for use with the GVT100S-TL

- 7F82-50 – 5m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F82-30 - 3m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F81-50 - 5m cable ending in 3 x microdot plugs (X, Y, Z)
- 7F81-30 - 3m cable ending in 3 x microdot plugs (X, Y, Z)

Kemo Limited

First Floor, 33 King Street, Theford, Norfolk, IP24 2AW, United Kingdom
+44 (0)1474 705168



www.kemo.com sales@kemo.com

- Triaxial IEPE Accelerometer
- Sensitivity – 10mV/g
- Shear design
- Piezoelectric ceramic PZT-5
- Mass - 11grams
- ¼-28UNF side entry 4 pin connector
- Tapped base for stud mounting



The GVT10S-TC is a general purpose cube shaped triaxial IEPE accelerometer for the measurement of broadband vibration in a wide range of vibration test applications, its small size and low mass make it an ideal all rounder. With a tapped base on two sides it provides flexible mounting options.

| Specification | Metric | Imperial |
|-----------------------------|----------------------------------|---------------------|
| Sensitivity | 1.02mV/(m/s ²) | 10mV/g |
| Measurement Range (pk) | ±4900m/s ² | ±500g |
| Frequency Range ±10% | (Y,Z) 1 to 8000 Hz (X) 1 to 7000 | |
| Resonant Frequency | ≥30 kHz | |
| Non-Linearity | ≤1 % | |
| Transverse Sensitivity | ≤5 % | |
| Electrical Noise Floor | 0.01m/s ² rms | 0.001g rms |
| Overload Limit (Shock) | ±29400(m/s ²)pk | ±3000gpk |
| Operating Temp. Range | -55 to +125°C | -67 to +257°F |
| Compliance Voltage (Supply) | +18 to +28 VDC | |
| Current range | 2 – 20mA | |
| Output Bias Voltage | 10VDC ± 2VDC | |
| Size (excluding connector) | 14x14x14 (mm) | 0.55x0.55x0.55 (in) |
| Weight | 11gm | 0.39oz |
| Sensing Geometry | Shear | |
| Sensing Element Material | PZT-5 | |
| Case Material | Titanium | |
| Connector Position | Side | |
| Case sealing | Hermetic | |
| Electrical Connection Type | ¼-28UNF 4 pin | |
| Mounting | 10/32UNF Tapped Base | |

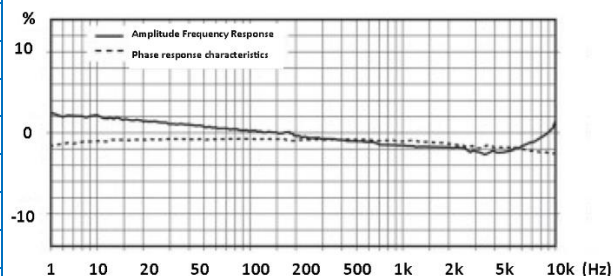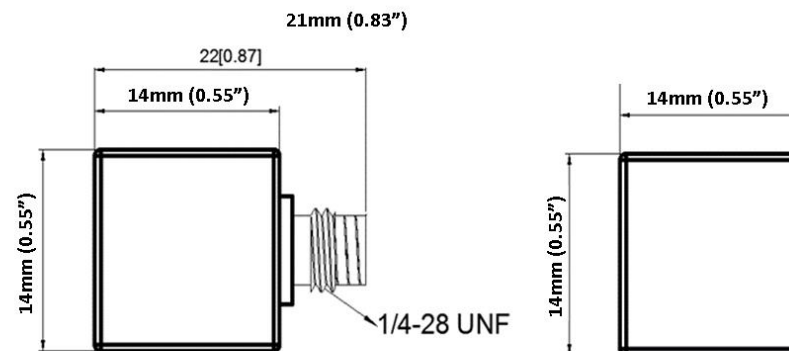

Kemo has a range of cable assemblies available for use with the GVT10S-TC

- 7F82-50 – 5m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F82-30 - 3m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F81-50 - 5m cable ending in 3 x microdot plugs (X, Y, Z)
- 7F81-30 - 3m cable ending in 3 x microdot plugs (X, Y, Z)

Kemo Limited

First Floor, 33 King Street, Theford, Norfolk, IP24 2AW, United Kingdom
+44 (0)1474 705168

www.kemo.com sales@kemo.com



Iss.1 – January 2024

- Triaxial IEPE Accelerometer
- Sensitivity – 20mV/g
- Shear design
- Piezoelectric ceramic PZT-5
- Mass - 11grams
- 1/4-28UNF side entry 4 pin connector
- Tapped base for stud mounting



The GVT20S-T is a general purpose triaxial IEPE accelerometer for the measurement of broad band vibration in a wide range of vibration test applications, its small size and low mass make it an ideal all rounder.

| Specification | Metric | Imperial |
|-----------------------------|----------------------------------|---------------------|
| Sensitivity | 2.04mV/(m/s ²) | 20mV/g |
| Measurement Range (pk) | ±2,452m/s ² | ±250g |
| Frequency Range ±10% | (Y,Z) 1 to 8000 Hz (X) 1 to 7000 | |
| Resonant Frequency | ≥30 kHz | |
| Non-Linearity | ≤1 % | |
| Transverse Sensitivity | ≤5 % | |
| Electrical Noise Floor | 0.001m/s ² rms | 0.0001g rms |
| Overload Limit (Shock) | ±49000(m/s ²)pk | ±5000gpk |
| Operating Temp. Range | -55 to +125°C | -67 to +257°F |
| Compliance Voltage (Supply) | +18 to +28 VDC | |
| Current range | 2 – 20mA | |
| Output Bias Voltage | 11VDC ± 1.5VDC | |
| Size (excluding connector) | 14x14x14 (mm) | 0.55x0.55x0.55 (in) |
| Weight | 11gm | 0.39oz |
| Sensing Geometry | Shear | |
| Sensing Element Material | PZT-5 | |
| Case Material | Titanium | |
| Connector Position | Side | |
| Case sealing | Hermetic | |
| Electrical Connection Type | 1/4-28UNF 4 pin | |
| Mounting | 10/32UNF Tapped Base | |

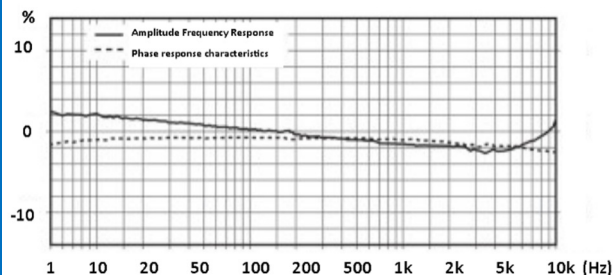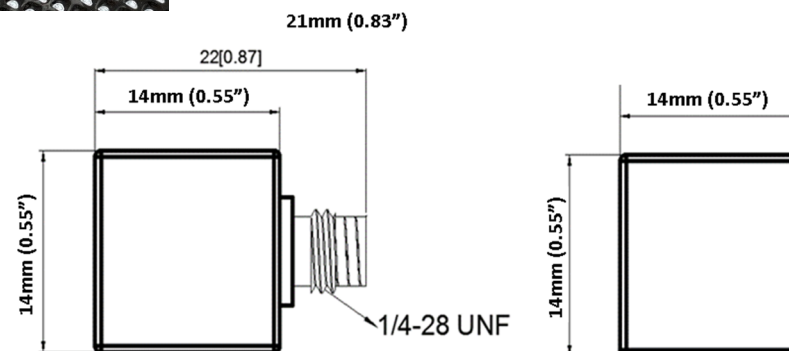

Kemo has a range of cable assemblies available for use with the GVT20S-T

- 7F82-50 – 5m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F82-30 - 3m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F81-50 - 5m cable ending in 3 x microdot plugs (X, Y, Z)
- 7F81-30 - 3m cable ending in 3 x microdot plugs (X, Y, Z)

Kemo Limited

First Floor, 33 King Street, Theford, Norfolk, IP24 2AW, United Kingdom
+44 (0)1474 705168



www.kemo.com sales@kemo.com

- Triaxial IEPE Accelerometer
- Sensitivity – 50mV/g
- Shear design
- Piezoelectric ceramic PZT-5
- Mass - 11grams
- 1/4-28UNF side entry 4 pin connector
- Tapped base for stud mounting



The GVT50S-T is a general purpose triaxial IEPE accelerometer for the measurement of broad band vibration in a wide range of vibration test applications, its small size and low mass make it an ideal all rounder.

| Specification | Metric | Imperial |
|-----------------------------|----------------------------------|---------------------|
| Sensitivity | 5.10mV/(m/s ²) | 50mV/g |
| Measurement Range (pk) | ±980m/s ² | ±100g |
| Frequency Range ±10% | (Y,Z) 1 to 8000 Hz (X) 1 to 7000 | |
| Resonant Frequency | ≥30 kHz | |
| Non-Linearity | ≤1 % | |
| Transverse Sensitivity | ≤5 % | |
| Electrical Noise Floor | 0.002m/s ² rms | 0.0002g rms |
| Overload Limit (Shock) | ±49000(m/s ²)pk | ±5000gpk |
| Operating Temp. Range | -55 to +125°C | -67 to +257°F |
| Compliance Voltage (Supply) | +18 to +28 VDC | |
| Current range | 2 – 20mA | |
| Output Bias Voltage | 11VDC ± 1.5VDC | |
| Size (excluding connector) | 14x14x14 (mm) | 0.55x0.55x0.55 (in) |
| Weight | 11gm | 0.39oz |
| Sensing Geometry | Shear | |
| Sensing Element Material | PZT-5 | |
| Case Material | Titanium | |
| Connector Position | Side | |
| Case sealing | Hermetic | |
| Electrical Connection Type | 1/4-28UNF 4 pin | |
| Mounting | 10/32UNF Tapped Base | |

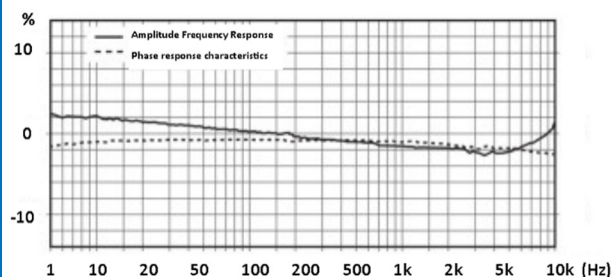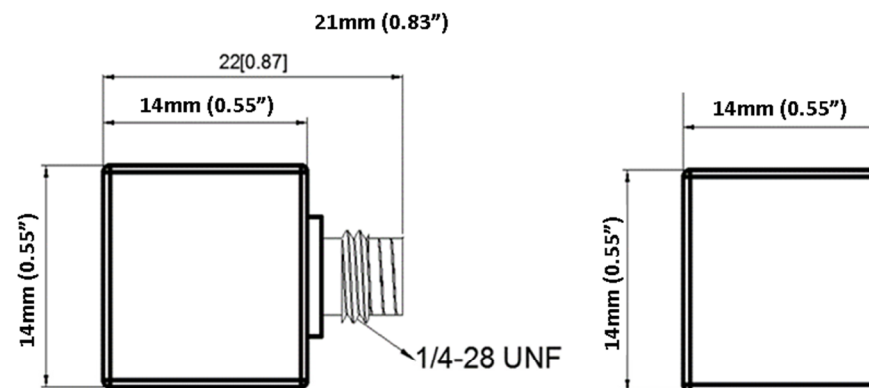

Kemo has a range of cable assemblies available for use with the GVT50S-T

- 7F82-50 – 5m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F82-30 - 3m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F81-50 - 5m cable ending in 3 x microdot plugs (X, Y, Z)
- 7F81-30 - 3m cable ending in 3 x microdot plugs (X, Y, Z)

Kemo Limited

First Floor, 33 King Street, Theford, Norfolk, IP24 2AW, United Kingdom
+44 (0)1474 705168



www.kemo.com sales@kemo.com

- Triaxial IEPE Accelerometer
- Sensitivity – 100mV/g
- Shear design
- Piezoelectric ceramic PZT-5
- Mass - 11grams
- ¼-28UNF side entry 4 pin connector
- Tapped base for stud mounting



The GVT100S-T is a general purpose triaxial IEPE accelerometer for the measurement of broad band vibration in a wide range of vibration test applications, its small size and low mass make it an ideal all rounder.

| Specification | Metric | Imperial |
|-----------------------------|----------------------------------|---------------------|
| Sensitivity | 10mV/(m/s ²) | 100mV/g |
| Measurement Range (pk) | ±490m/s ² | ±50g |
| Frequency Range ±10% | (Y,Z) 1 to 8000 Hz (X) 1 to 7000 | |
| Resonant Frequency | ≥30 kHz | |
| Non-Linearity | ≤1 % | |
| Transverse Sensitivity | ≤5 % | |
| Electrical Noise Floor | 0.001m/s ² rms | 0.0001g rms |
| Overload Limit (Shock) | ±49000(m/s ²)pk | ±5000gpk |
| Operating Temp. Range | -55 to +125°C | -67 to +257°F |
| Compliance Voltage (Supply) | +18 to +28 VDC | |
| Current range | 2 – 10mA | |
| Output Bias Voltage | 11VDC ± 1.5VDC | |
| Size (excluding connector) | 14x14x14 (mm) | 0.55x0.55x0.55 (in) |
| Weight | 11gm | 0.39oz |
| Sensing Geometry | Shear | |
| Sensing Element Material | PZT-5 | |
| Case Material | Titanium | |
| Connector Position | Side | |
| Case sealing | Hermetic | |
| Electrical Connection Type | ¼-28UNF 4 pin | |
| Mounting | 10/32UNF Tapped Base | |

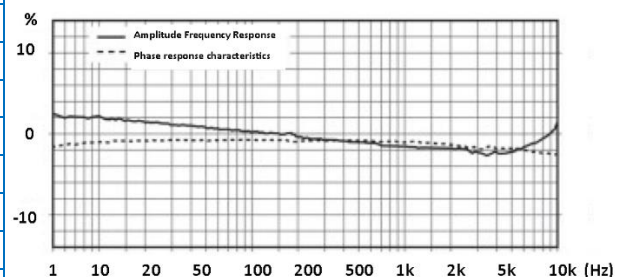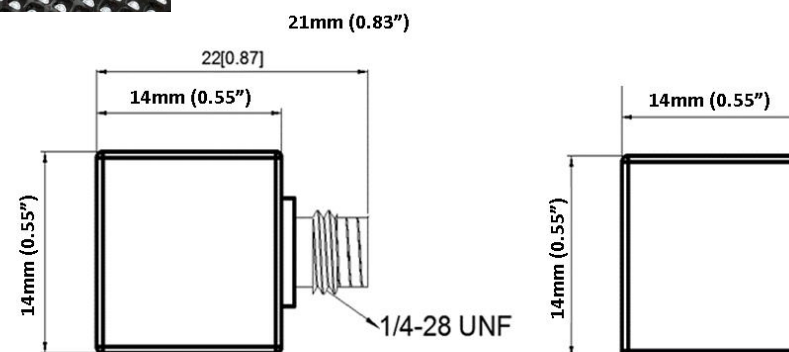

Kemo has a range of cable assemblies available for use with the GVT100S-T

- 7F82-50 – 5m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F82-30 - 3m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F81-50 - 5m cable ending in 3 x microdot plugs (X, Y, Z)
- 7F81-30 - 3m cable ending in 3 x microdot plugs (X, Y, Z)

Kemo Limited



First Floor, 33 King Street, Theford, Norfolk, IP24 2AW, United Kingdom
+44 (0)1474 705168

www.kemo.com sales@kemo.com

- Triaxial IEPE Accelerometer
- Sensitivity – 10mV/g
- Shear design
- Piezoelectric ceramic PZT-5
- Mass - 8grams
- ¼-28UNF side entry 4 pin connector
- Through hole mounting

The GVT10S-H is a general purpose triaxial IEPE accelerometer for the measurement of broad band vibration in a wide range of vibration test applications, its small size and low mass make it an ideal all rounder. The Through hole mounting allows for directional control of the connector when mounting.

| Specification | Metric | Imperial |
|-----------------------------|--------------------------------------|---------------------|
| Sensitivity | 1mV/(m/s ²) | 10mV/g |
| Measurement Range (pk) | ±4900m/s ² | ±500g |
| Frequency Range ±10% | (Z) 1 to 10000 Hz, (X,Y) 1 to 8000Hz | |
| Resonant Frequency | ≥25 kHz | |
| Non-Linearity | ≤1 % | |
| Transverse Sensitivity | ≤5 % | |
| Electrical Noise Floor | 0.01m/s ² rms | 0.001g rms |
| Overload Limit (Shock) | ±49000(m/s ²)pk | ±5000gpk |
| Operating Temp. Range | -55 to +125°C | -67 to +257°F |
| Compliance Voltage (Supply) | +18 to +28 VDC | |
| Current range | 2 – 10mA | |
| Output Bias Voltage | 11VDC ± 1.5VDC | |
| Size (excluding connector) | 15x15x10 (mm) | 0.59x0.59x0.39 (in) |
| Weight | 8gm | 0.282oz |
| Sensing Geometry | Shear | |
| Sensing Element Material | PZT-5 | |
| Case Material | Titanium | |
| Connector Position | Side | |
| Case sealing | Hermetic | |
| Electrical Connection Type | ¼-28UNF 4 pin | |
| Mounting | Ø4.1mm (0.16") through hole | |

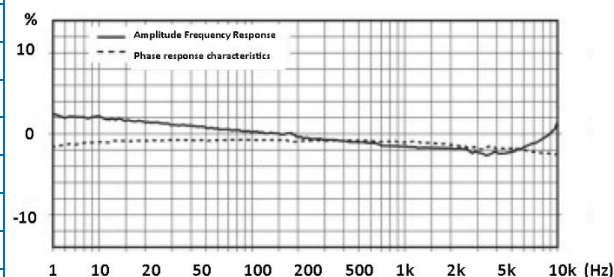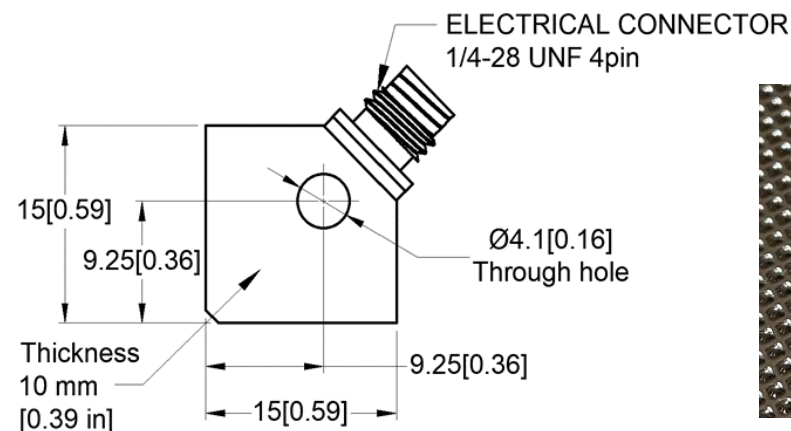

Kemo has a range of cable assemblies available for use with the GVT10S-H

- 7F82-50 – 5m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F82-30 - 3m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F81-50 - 5m cable ending in 3 x microdot plugs (X, Y, Z)
- 7F81-30 - 3m cable ending in 3 x microdot plugs (X, Y, Z)

Kemo Limited



First Floor, 33 King Street, Theford, Norfolk, IP24 2AW, United Kingdom
+44 (0)1474 705168

www.kemo.com sales@kemo.com

- Triaxial IEPE Accelerometer
- Sensitivity – 20mV/g
- Shear design
- Piezoelectric ceramic PZT-5
- Mass - 8grams
- ¼-28UNF side entry 4 pin connector
- Through hole mounting

The GVT20S-H is a general purpose triaxial IEPE accelerometer for the measurement of broad band vibration in a wide range of vibration test applications, its small size and low mass make it an ideal all rounder. The Through hole mounting allows for directional control of the connector when mounting.

| Specification | Metric | Imperial |
|-----------------------------|-------------------------------|---------------------|
| Sensitivity | 2mV/(m/s ²) | 20mV/g |
| Measurement Range (pk) | ±2451m/s ² | ±250g |
| Frequency Range ±10% | (Z)1 to 10kHz, (X,Y)1 to 8kHz | |
| Resonant Frequency | ≥25 kHz | |
| Non-Linearity | ≤1 % | |
| Transverse Sensitivity | ≤5 % | |
| Electrical Noise Floor | 0.005m/s ² rms | 0.0005g rms |
| Overload Limit (Shock) | ±49000(m/s ²)pk | ±5000gpk |
| Operating Temp. Range | -55 to +125°C | -67 to +257°F |
| Compliance Voltage (Supply) | +18 to +28 VDC | |
| Current range | 2 – 10mA | |
| Output Bias Voltage | 11VDC ± 1.5VDC | |
| Size (excluding connector) | 15x15x10 (mm) | 0.59x0.59x0.39 (in) |
| Weight | 8gm | 0.282oz |
| Sensing Geometry | Shear | |
| Sensing Element Material | PZT-5 | |
| Case Material | Titanium | |
| Connector Position | Side | |
| Case sealing | Hermetic | |
| Electrical Connection Type | ¼-28UNF 4 pin | |
| Mounting | Ø4.1mm (0.16") through hole | |

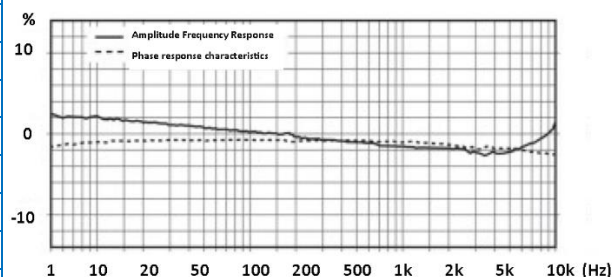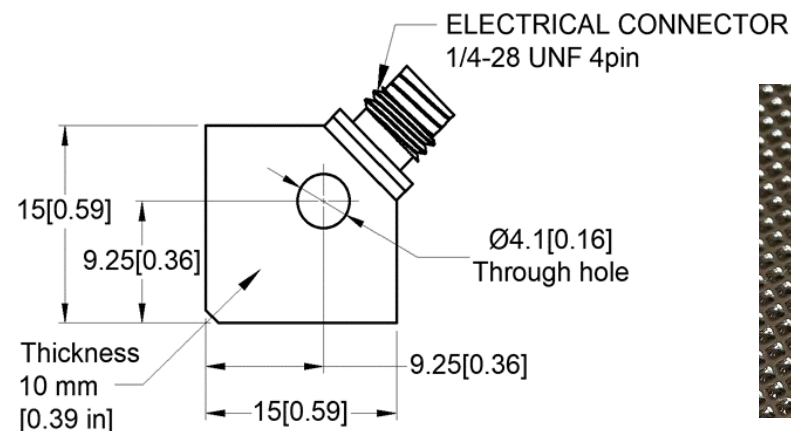

Kemo has a range of cable assemblies available for use with the GVT20S-H

- 7F82-50 – 5m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F82-30 - 3m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F81-50 - 5m cable ending in 3 x microdot plugs (X, Y, Z)
- 7F81-30 - 3m cable ending in 3 x microdot plugs (X, Y, Z)

Kemo Limited



First Floor, 33 King Street, Theford, Norfolk, IP24 2AW, United Kingdom
+44 (0)1474 705168

www.kemo.com sales@kemo.com

- Triaxial IEPE Accelerometer
- Sensitivity – 50mV/g
- Shear design
- Piezoelectric ceramic PZT-5
- Mass - 12grams
- 1/4-28UNF side entry 4 pin connector
- Through hole mounting

The GVT50S-H is a general purpose triaxial IEPE accelerometer for the measurement of broad band vibration in a wide range of vibration test applications, its small size and low mass make it an ideal all rounder. The Through hole mounting allows for directional control of the connector when mounting.

| Specification | Metric | Imperial |
|-----------------------------|-------------------------------|---------------------|
| Sensitivity | 5mV/(m/s ²) | 50mV/g |
| Measurement Range (pk) | ±980m/s ² | ±100g |
| Frequency Range ±10% | (Z)1 to 10kHz, (X,Y)1 to 8kHz | |
| Resonant Frequency | ≥25 kHz | |
| Non-Linearity | ≤1 % | |
| Transverse Sensitivity | ≤5 % | |
| Electrical Noise Floor | 0.002m/s ² rms | 0.0002g rms |
| Overload Limit (Shock) | ±9800(m/s ²)pk | ±1000gpk |
| Operating Temp. Range | -55 to +125°C | -67 to +257°F |
| Compliance Voltage (Supply) | +18 to +28 VDC | |
| Current range | 2 – 10mA | |
| Output Bias Voltage | 11VDC ± 1.5VDC | |
| Size (excluding connector) | 16x16x11 (mm) | 0.63x0.63x0.43 (in) |
| Weight | 12gm | 0.423oz |
| Sensing Geometry | Shear | |
| Sensing Element Material | PZT-5 | |
| Case Material | Titanium | |
| Connector Position | Side | |
| Case sealing | Hermetic | |
| Electrical Connection Type | 1/4-28UNF 4 pin | |
| Mounting | Ø4.1mm (0.16") through hole | |

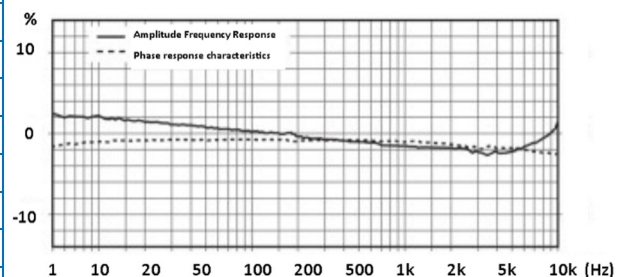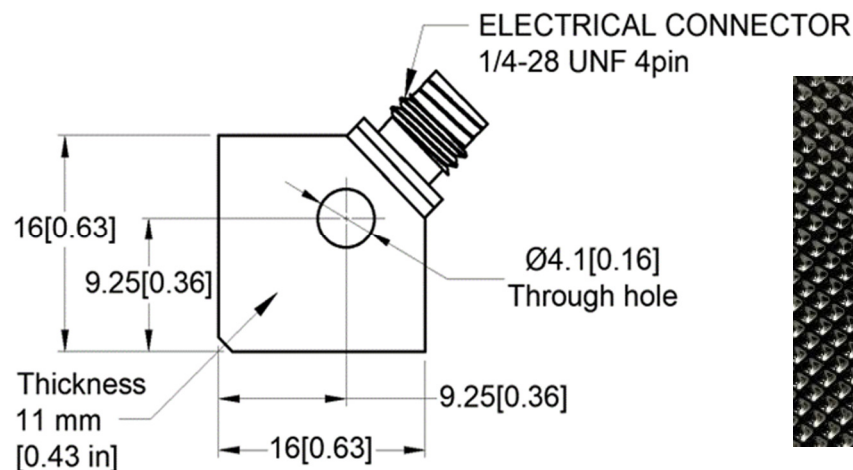

Kemo has a range of cable assemblies available for use with the GVT50S-H

- 7F82-50 – 5m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F82-30 - 3m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F81-50 - 5m cable ending in 3 x microdot plugs (X, Y, Z)
- 7F81-30 - 3m cable ending in 3 x microdot plugs (X, Y, Z)

Kemo Limited



First Floor, 33 King Street, Theford, Norfolk, IP24 2AW, United Kingdom
+44 (0)1474 705168

www.kemo.com sales@kemo.com

- Triaxial IEPE Accelerometer
- Sensitivity – 100mV/g
- Shear design
- Piezoelectric ceramic PZT-5
- Mass - 12grams
- ¼-28UNF side entry 4 pin connector
- Through hole mounting

The GVT100S-H is a general purpose triaxial IEPE accelerometer for the measurement of broad band vibration in a wide range of vibration test applications, its small size and low mass make it an ideal all rounder. The Through hole mounting allows for directional control of the connector when mounting.

| Specification | Metric | Imperial |
|-----------------------------|--------------------------------------|---------------------|
| Sensitivity | 10mV/(m/s ²) | 100mV/g |
| Measurement Range (pk) | ±490m/s ² | ±50g |
| Frequency Range ±10% | (Z) 1 to 10000 Hz, (X,Y) 1 to 8000Hz | |
| Resonant Frequency | ≥25 kHz | |
| Non-Linearity | ≤1 % | |
| Transverse Sensitivity | ≤5 % | |
| Electrical Noise Floor | 0.001m/s ² rms | 0.0001g rms |
| Overload Limit (Shock) | ±49000(m/s ²)pk | ±5000gpk |
| Operating Temp. Range | -55 to +125°C | -67 to +257°F |
| Compliance Voltage (Supply) | +18 to +28 VDC | |
| Current range | 2 – 10mA | |
| Output Bias Voltage | 11VDC ± 1.5VDC | |
| Size (excluding connector) | 16x16x11 (mm) | 0.63x0.63x0.43 (in) |
| Weight | 12gm | 0.423oz |
| Sensing Geometry | Shear | |
| Sensing Element Material | PZT-5 | |
| Case Material | Titanium | |
| Connector Position | Side | |
| Case sealing | Hermetic | |
| Electrical Connection Type | ¼-28UNF 4 pin | |
| Mounting | Ø4.1mm (0.16") through hole | |

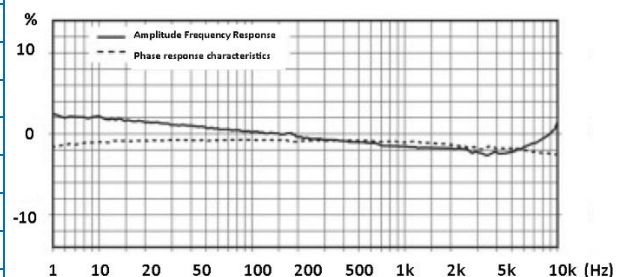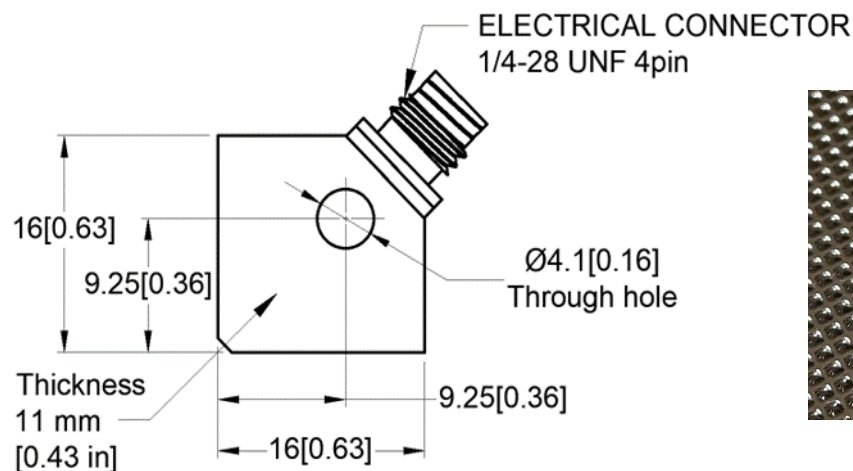

Kemo has a range of cable assemblies available for use with the GVT100S-H

- 7F82-50 – 5m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F82-30 - 3m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F81-50 - 5m cable ending in 3 x microdot plugs (X, Y, Z)
- 7F81-30 - 3m cable ending in 3 x microdot plugs (X, Y, Z)

Kemo Limited



First Floor, 33 King Street, Theford, Norfolk, IP24 2AW, United Kingdom
+44 (0)1474 705168

www.kemo.com sales@kemo.com

- Triaxial IEPE Accelerometer
- Sensitivity – 200mV/g
- Shear design
- Piezoelectric ceramic PZT-5
- Mass - 12grams
- ¼-28UNF side entry 4 pin connector
- Through hole mounting

The GVT200S-H is a general purpose triaxial IEPE accelerometer for the measurement of broad band vibration in a wide range of vibration test applications, its small size and low mass make it an ideal all rounder. The Through hole mounting allows for directional control of the connector when mounting.

| Specification | Metric | Imperial |
|-----------------------------|-------------------------------------|---------------------|
| Sensitivity | 20.4mV/(m/s ²) | 200mV/g |
| Measurement Range (pk) | ±245m/s ² | ±25g |
| Frequency Range ±10% | (Z) 1 to 8000 Hz, (X,Y) 1 to 7000Hz | |
| Resonant Frequency | ≥25 kHz | |
| Non-Linearity | ≤1 % | |
| Transverse Sensitivity | ≤5 % | |
| Electrical Noise Floor | 0.0005m/s ² rms | 0.00005g rms |
| Overload Limit (Shock) | ±49000(m/s ²)pk | ±5000gpk |
| Operating Temp. Range | -55 to +125°C | -67 to +257°F |
| Compliance Voltage (Supply) | +18 to +28 VDC | |
| Current range | 2 – 10mA | |
| Output Bias Voltage | 11VDC ± 1.5VDC | |
| Size (excluding connector) | 16x16x11 (mm) | 0.63x0.63x0.43 (in) |
| Weight | 12gm | 0.423oz |
| Sensing Geometry | Shear | |
| Sensing Element Material | PZT-5 | |
| Case Material | Titanium | |
| Connector Position | Side | |
| Case sealing | Hermetic | |
| Electrical Connection Type | ¼-28UNF 4 pin | |
| Mounting | Ø4.1mm (0.16") through hole | |

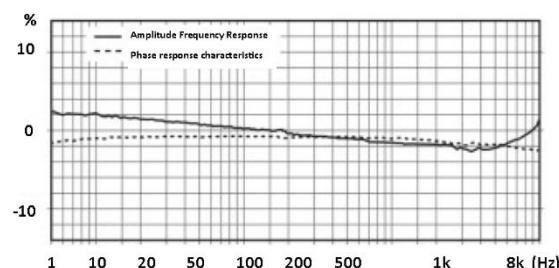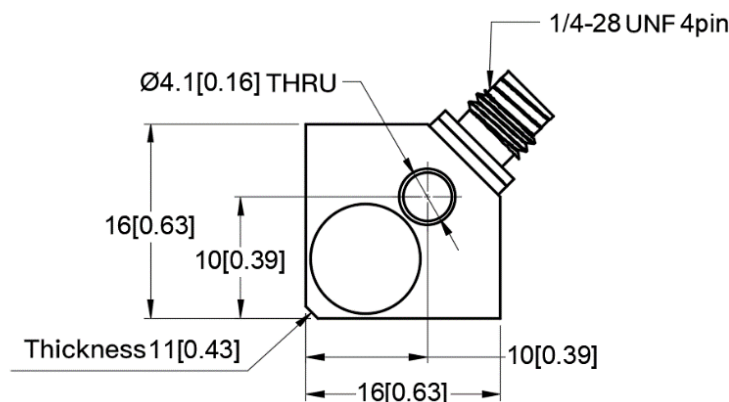

Kemo has a range of cable assemblies available for use with the GVT200S-H

- 7F82-50 – 5m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F82-30 - 3m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F81-50 - 5m cable ending in 3 x microdot plugs (X, Y, Z)
- 7F81-30 - 3m cable ending in 3 x microdot plugs (X, Y, Z)

Kemo Limited

First Floor, 33 King Street, Theford, Norfolk, IP24 2AW, United Kingdom
+44 (0)1474 705168

www.kemo.com sales@kemo.com